



INSTALLATION INSTRUCTIONS

AFL Apex™ X-2 Sealed Splice Closure



TABLE OF CONTENTS

PACKAGE CONTENTS	2	INSTALLING SEALING WEDGE.....	10
REQUIRED TOOLS	2	SMALL DIAMETER CABLE BUSHING	10
ADDITIONAL KITS.....	2	ROUTING IN SPLICE BASKET	11
APEX DEFINED	3	INNER BASKET APPLICATIONS	11
OPENING APEX	5	SPLICE TRAY OPTIONS AND ROUTING	12
SEALING WEDGE REMOVAL	6	INSTALLING SPLICE TRAY	13
CABLE PREPARATION	7	ALTERNATE SPLICING METHOD	14
LENGTH TABLE.....	7	FINAL ASSEMBLY	15
CABLE ATTACHMENT UNIT	8	MOUNTING APEX	16
CABLE GROUNDING	9		

PACKAGE CONTENTS

Apex Closure
Cable Attachment Units – as ordered
Splice Trays – as ordered
Installation Kit
Installation Instructions

REQUIRED TOOLS

216 can wrench
Tape measure
Tie wrap or Velcro for basket retention
Wire cutter for strength member
Splicer's scissors
Splice equipment and sleeves
Cable entry tools
Cable stripper

Cable splicer knife
9" Lineman's pliers

Optional Consumables

AFL Foam Retention Kit (pack of 25 - AFL no. HW000406)
Electrical tape
Mesh transition tube, if desired (AFL no. AX-KIT-TUBE-014-XX*)
Silicone spiral wrap (AFL no. FC001657)

ADDITIONAL KITS


DESCRIPTION	AFL NO.
Aerial strand mount hanger kit	AX-KIT-AERIAL-1
Pole/wall mount kit	AX-BR30
1/4" Colored Mesh Transition Tubing, 250' Spool	AX-KIT-TUBE-014-XX*
Single Cable Strain Relief/Attachment Kit	AX-KIT-CBLSTRN
Multi-Drop Cable Entry Kit (fits up to 4 cables 0.20" to 0.39" in diameter or flat drop cable)	AX-KIT-DROP-4
X-2 and X-2S Dome to Base O-Ring Replacement Kit	AX-KIT-ORING-2
X-2 and X-2S Dome to Base Locking Ring Clamp Replacement Kit	AX-KIT-CLAMP-2
X-2 and X-2S Wedge Replacement Kit	AX-KIT-WEDGE-2
X-2 and X-2S Installation Stand	FC104649
Apex X-2 and X-2S Inner Base Gel Replacement Kit	AX-KIT-GEL-2
Apex X-2 Dome Replacement Kit	AX-KIT-DOME-2
Clear segmented basket for X-2. Can be used in combination with the basket cover.	AX-KIT-SBASKET-2
Replacement slack storage basket tabs – pack of 25	AX-KIT-BTAB-25

*Replace "XX" with any of the following for colors per the TIA-598 color code - BL, OR, GR, BR, SL, WH, RD, BK, YL, VI, RS or AQ
Splitter trays available. See AFL website for ordering information.


ADDITIONAL SPLICE TRAYS			
DESCRIPTION	TRAY CAPACITY		AFL NO.
	SINGLE	MASS	
X-2 Tray loaded with two splice modules	36	144	AX-TRAY-2-2
X-2 Tray fully loaded with four splice modules (576 fibers per tray only, recommended for rollable ribbon, e.g. AFL SWR®)	72	576	AX-TRAY-2-4
Additional splice module (18 single fusion triple stacked, 12 mass fusion double stacked, 6 mechanical) – Pack of 20	-	-	AX-TRAY-MOD-20
X-2 Tray Empty	-	-	AX-TRAY-2-E

*576 fibers per tray with mass fusion double-stacking (3,456 total closure capacity), only recommended for 200 µm type rollable ribbon. For 250 µm, cut capacity in half with single-stacking.

APEX DEFINED

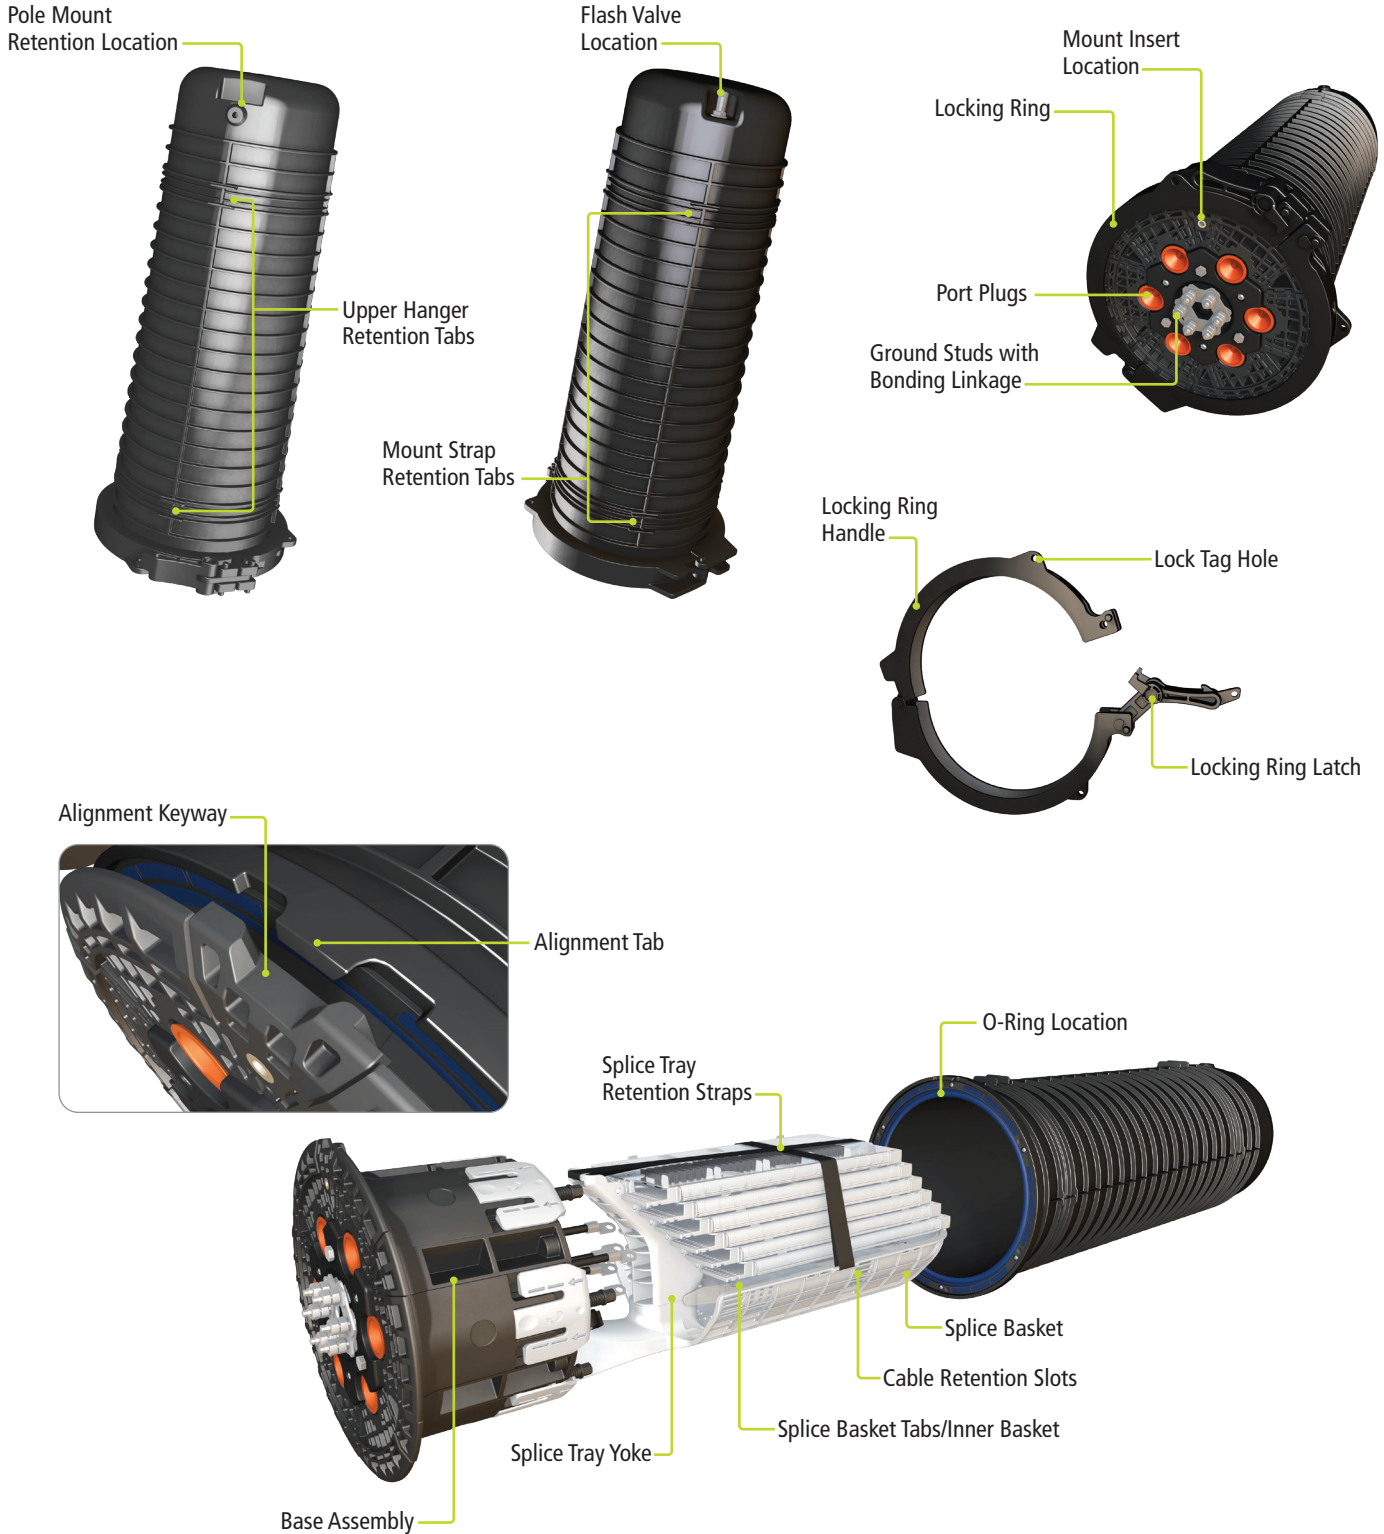

APEX DEFINED

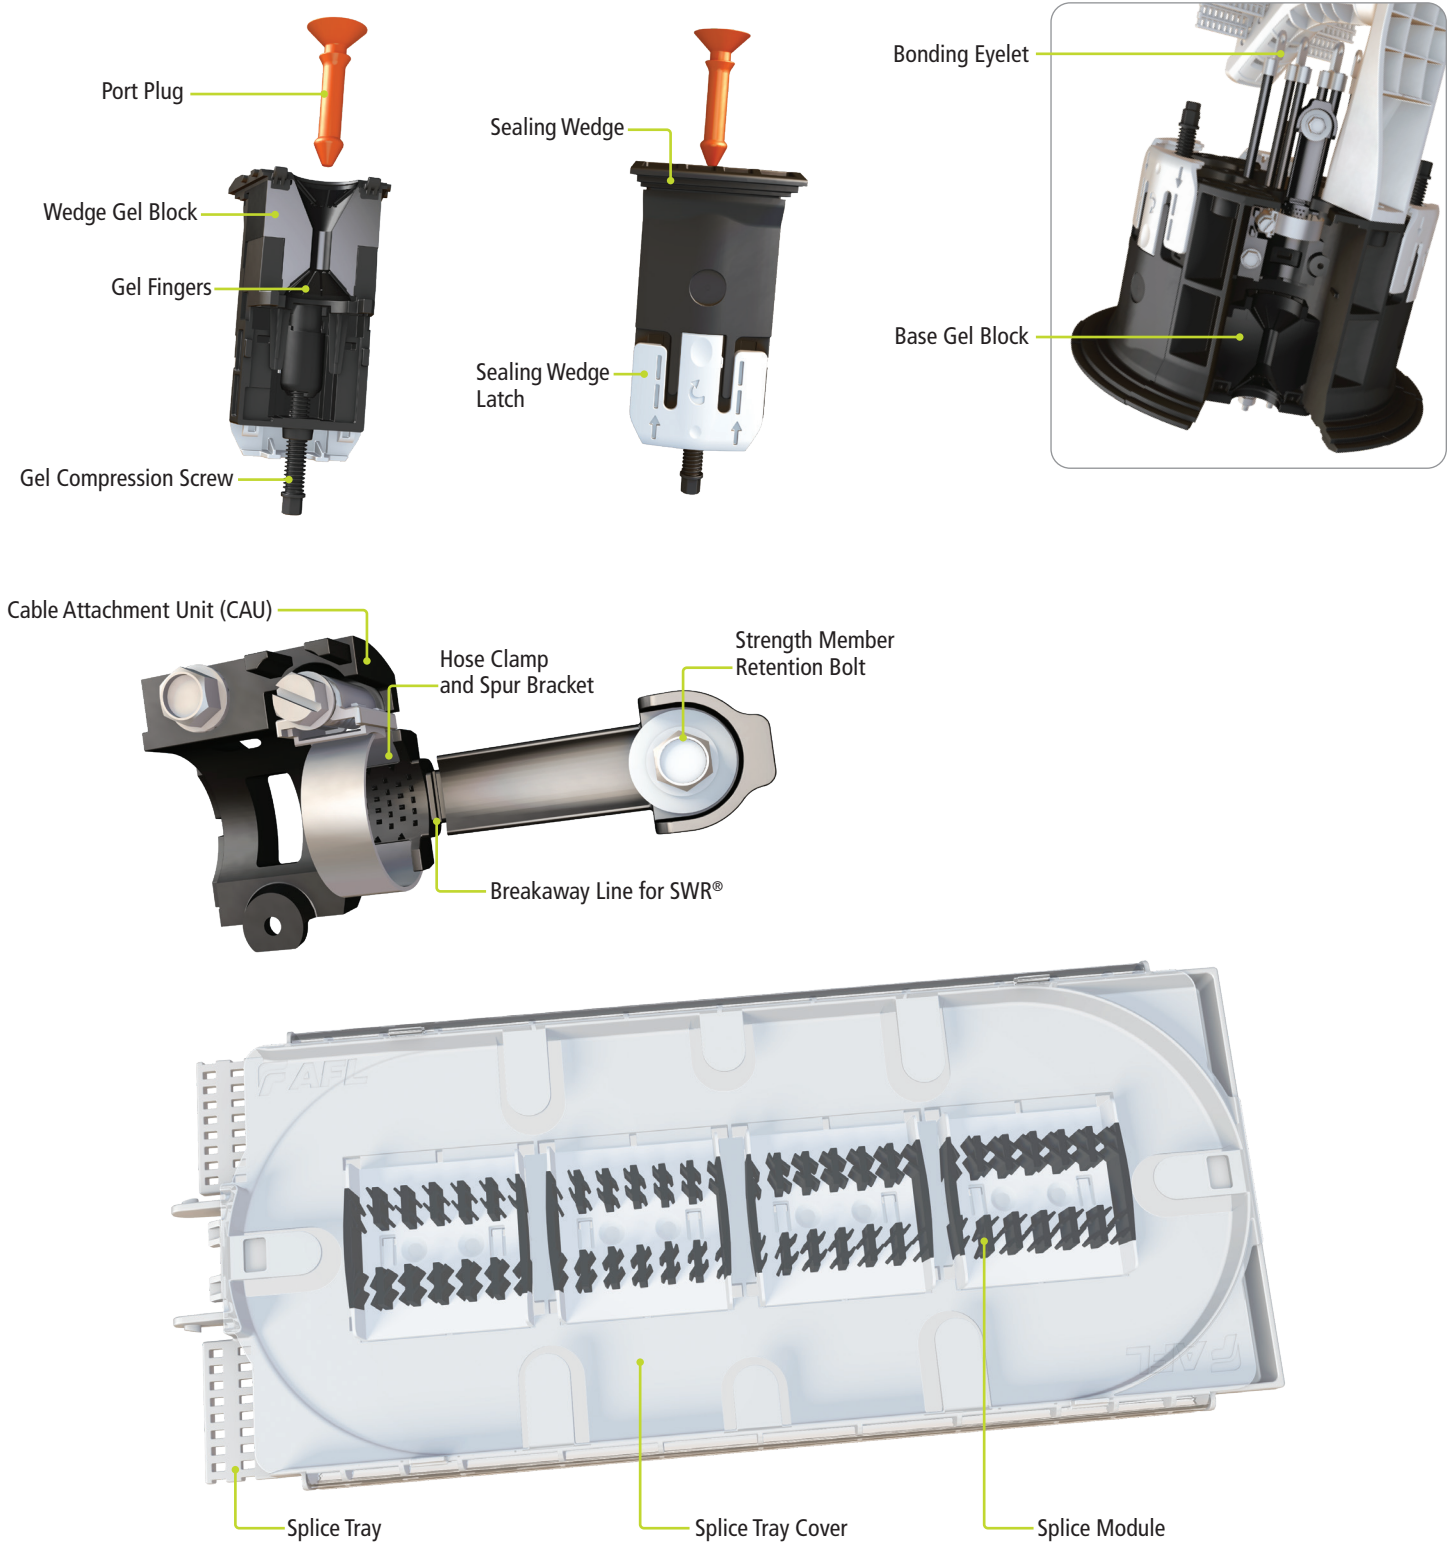

OPENING APEX

1. Release pressure valve to ensure no pressure or vacuum is present. (Figure 1)
2. Disengage locking ring.
3. Pull lock ring handle to disengage. (Figure 2)
4. Disengage lock ring latch.
5. Set aside Lock ring.
6. Orient Apex to have mount insert alignment tab up. (Figure 3)
7. Slide Apex dome off base and take care to keep attached dome O-ring seal area clean.
8. Install Apex into optional Installation Stand. (Figure 4)
9. Align mount insert alignment tab on top in center, basket down.
10. Set Apex on stand with base ring secured in stand slot.
11. Engage both retention clamps on base.
12. Undo both splice tray retention straps.
13. Remove splice trays.
14. Disengage splice tray using sheath knife or similar method to open the splice tray hinge. (Figures 5 and 6)
15. Rotate splice tray to disengage.
16. Loosen stand retention clamps to install backbone cable in port 1 and port 2. Rotate Apex to have basket on top, mount insert at bottom, and re-engage stand retention clamps.

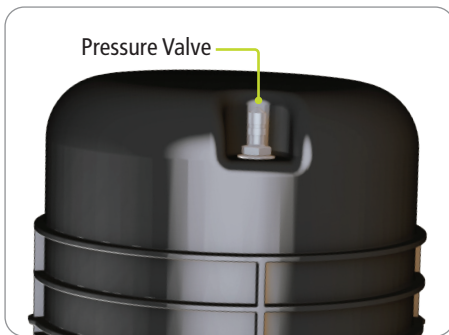


Figure 1



Figure 2

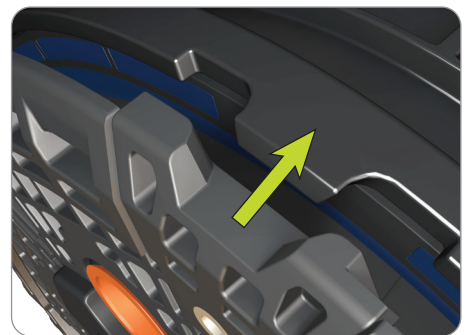


Figure 3

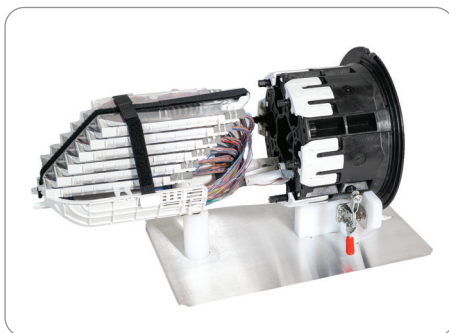


Figure 4



Figure 5

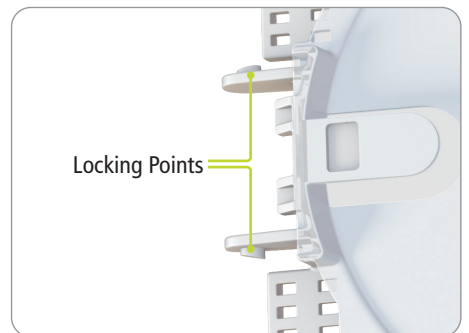


Figure 6

SEALING WEDGE REMOVAL

For the port to install a cable:

1. Depress sealing wedge latch and slide wedge cover toward the base. (Figure 7)
 2. Rotate wedge away from base pivoting at the base of the wedge.
 3. Rotate until the wedge tabs disengage from the base.
 4. Take orange port plug and discard after installation is complete. (Figure 8)
 5. Ensure the base gel remains secure in the base.
- ⊗ *If it becomes separated, simply re-install making sure the lower fingers engage properly in the base.*
6. Manually compress the base gel block. (Figure 9)
 7. Confirm that sealing wedge gel compression screw is fully open.
 8. Manually elongate wedge gel block. (Figure 10)
 9. Set aside in a safe location.
- ⊗ *If either gel block is contaminated with dirt or debris, simply rinse gel block with water.*



Figure 7

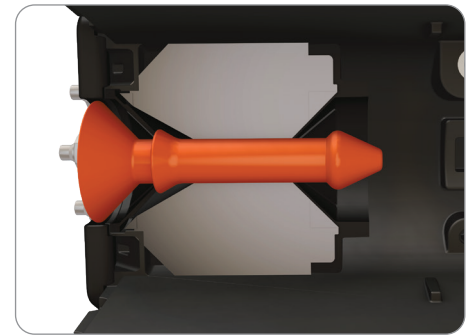


Figure 8



Figure 9



Figure 10

CABLE PREPARATION

Cable diameter, single port, in. (mm) 0.40" – 1.10" (10.0 – 28.0)

Cable diameter, multi-drop kit, in. (mm) 0.20" – 0.39" (5.0 – 9.9) or flat drop

LENGTH TABLE

CABLE /COMPONENT	TYPE OF OPENING	APEX X-2
Prep Length		(in.)
Wrapping Tube Cable (WTC)/Non Matrix Ribbon	Mid sheath	111-134**
	End cut	54-90**
Flat Matrix Ribbon	Mid sheath	108-110*
	End cut	54-57*
*** Loose Tube fiber	Mid sheath	111-134**
	End cut	54-90**
All cable types	Sheath to tray	41
CSM or strength members (Non SWR®)		2 – 2 ¼
Storage		
Each additional basket storage loop		23-27
Each additional Splice tray service loop		26-27
Sheath to basket for tube retention		8-11
Definition		
Midsheath	Slack loop in basket, service loop in tray, center cut	
End cut	Slack loop in basket, service loop in tray, to far splice location	
Sheath to tray	Slack loop in basket	
* Ribbon minimum is slack loop in basket, no slack waterfall splicing in tray		
** Minimum. No service loop in splice tray – maximum allowing for service loop in splice tray		
*** LT storage max tubes	Additional tubes will decrease cable lengths	18 (432/24 per tube)

AFL Wrapping Tube Cable (WTC)

- No need to secure strength rods.
- 8 - 11" of dielectric sheath or water block tape can be brought to basket.

Flat matrix ribbon

- Core tube or ribbon tube should extend from the sheath opening to be secured on the basket.
- Ribbon should be exposed from that point.

Loose tube

- Retained in basket. Leave loose tube stranding intact wherever possible in slack loop.

CABLE ATTACHMENT UNIT (CAU)

Parts of the CAU (Figure 11 and 12)

- Sheath end
- Hose clamp gear nest in CAU
- Strength member retention bolt
- Alignment tab on back
- SWR breakaway line
- Spur bracket and orientation small diameter cable bushing

Strength member (single or dual) trim to 2-2 ¼" as needed.
Spur brackets are installed open end to the splice tray.

⊗ *Cable must be free of all dirt or contamination.*

For WTC/SWR

1. Remove by hand, the strength member retention from the CAU at the breakaway line by hand. (Figure 11)
2. Armored WTC sheath will end at the CAU sheath end location.
 - Armor bond should be at 90 degrees to the CAU. (Figure 13)
3. Dielectric WTC or water block tape may be brought all the way to the basket.

For Flat Matrix and LT

1. Install sheath cut even with breakaway line.
2. Secure strength members under retention bolt without trapping or pinching tubes. (Figure 14)

For Micro Cable or cables under ½" diameter

1. Wrap at least three wraps of electrical tape around, where the hose clamp will tighten, to protect the inner tubes on Micro cable. Wrap electrical tape on all small diameter cables to bring OD up to ½" for spur bracket to properly engage.

⊗ *For WTC/SWR or other preferential bend cable, the strength rods or ridge location should be the same orientation for all cables entering the closure. This aids with the natural direction and ease of coiling all cables.*

⊗ *For mid-sheath on all WTC / SWR binders and tubed flat matrix ribbon, ensure there is no twisting in the mid sheath opening that occurs to trap groups in the splice basket.*

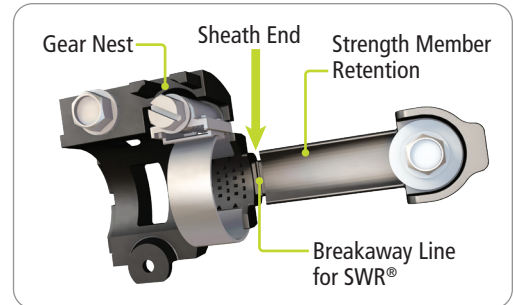


Figure 11

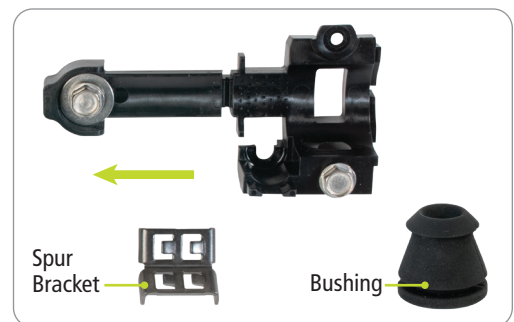


Figure 12

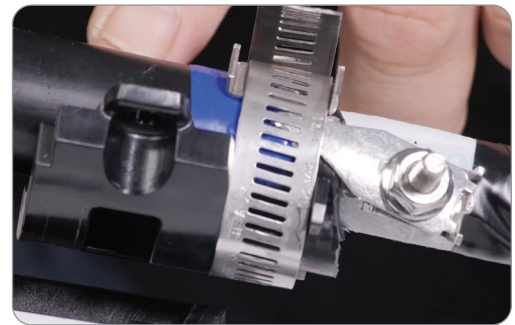


Figure 13

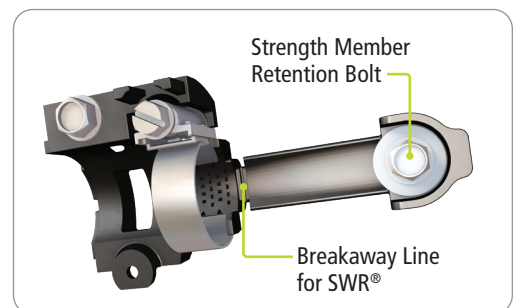


Figure 14

For all cable types

1. Secure hose clamp and install spur bracket making sure it is properly oriented (spur open toward the basket), but **do not fully tighten**.
2. If cable is armored and there is a ground stud, it should be oriented to the side of the CAU. (Figure 15)

CABLE GROUNDING

- Armored cables can be bonded using Apex ground straps. Simply slit cable armor on both sides at approximately 1" and install bonding hardware. (Figure 16)
- Bonding hardware is typically defined by local practice or end user. Apex offers a bonding eyelet for up to a ¼" ground stud. (Figure 17)
- AFL also offers a clamp on ground with eyelet.

Installing the populated CAU into Apex base

1. Bring CAU and Cable to base and carefully guide the exposed fiber to the basket.
2. Lower CAU to base and engage alignment tab. (Figure 18)
3. Using 216 can wrench, begin to thread the CAU retention screw.
 - Confirm alignment of CAU and fiber cable orientation.
 - Confirm the tail of hose clamp is in position to be retained.
 - Fully tighten CAU retention bolt. (Figure 19)
4. Verify WTC cable rods are aligned in all cables.
5. Tighten the hose clamp to secure cable.

⊗ **Do not over tighten hose clamp. It may affect the optical characteristics of the cable.**

6. Secure inbound cables with Velcro or tie wraps. Tubes or fibers near yoke of basket and outbound fibers should be secured closer to the outside of the basket. (Figure 20)



Figure 15



Figure 16



Figure 17

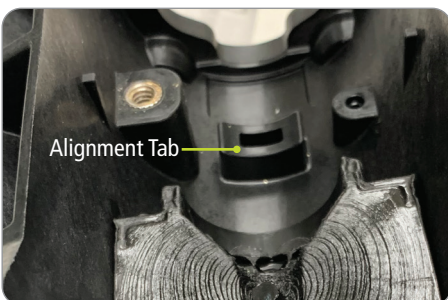


Figure 18

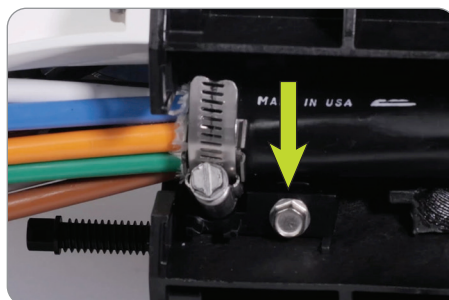


Figure 19



Figure 20

INSTALLING SEALING WEDGE

Make sure cable and ground are properly oriented and will not interfere with sealing wedge installation.

1. Depress base gel and elongate sealing wedge gel. (Figures 8 and 9 — page 6)
2. Ensure gel compression screw is in the relaxed position.
3. Engage sealing wedge pins into bottom of base. (Figure 21)
4. Rotate sealing wedge into place and depress the sealing wedge lock tab to engage latch and fully lock into place.
5. Inspect top and bottom of sealing wedge for complete engagement.
6. Attach bonding eyelet if applicable. (Figure 22)

SMALL DIAMETER CABLE BUSHING

1. Open bushing and install over small diameter cable with the taper toward the base. (Figure 23)
2. Take supplied tie wrap, begin to secure it within the groove.
3. Align head of tie wrap in opening of bushing slot. (Figure 24)
4. Pull tie wrap to cinch. Do not over tighten to deform bushing.
5. Slide bushing toward base port and firmly insert into wedge gel. (Figure 25)

⊗ *This bushing **MUST** be installed prior to compression of the gel compression screw.*

6. Tighten gel compression screw with 216 can wrench or similar tool. This will tighten to a positive stop; no need to tighten past that stop. (Figure 26)
7. Rotate closure in stand to install additional cables. Repeat CAU installation process.

⊗ *Once all cables have been installed and the gel compression screws have been tightened, the remaining empty port gel compression screws must be tightened on the orange port plug to seal the closure.*

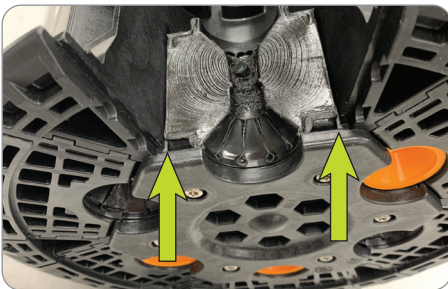


Figure 21

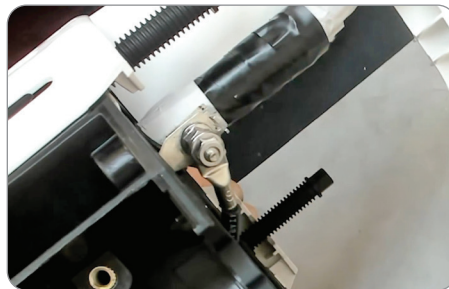


Figure 22

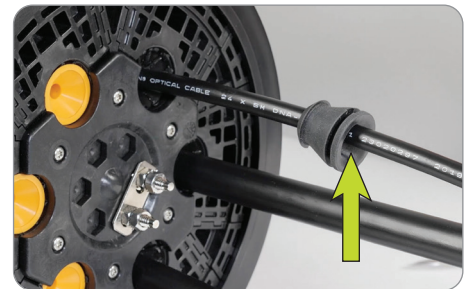


Figure 23



Figure 24



Figure 25



Figure 26

ROUTING IN SPLICE BASKET

All length cables include a storage loop in the basket. (Figure 27)

1. Rotate closure in stand to basket down position for the fiber to be routed and spliced.
2. Basket tabs may be removed for ease of initial installation squeezing and rotating the basket tab to remove.
3. These tabs may be replaced in the basket after initial installation.
4. Input cables are installed near the yoke base and exit near the top edge of basket.
5. Secure units with Velcro or tie wraps. (Figure 28)
6. Transport ribbon fiber from basket to tray with or without additional protection. AFL silicone spiral wrap, transition tubes or nylon weave may be used if desired.
7. Do not completely tighten the retention on fibers exiting to the tray. Basket fiber slack may need to be adjusted before final dressing.

⊗ **SWR and ribbon fiber can be safely transported from the basket to the tray without any additional protection. Secured with AFL foam retention.** (Figure 29)

8. Additional storage loops can be retained in the basket – see length table, page 7.
9. Ribbon fiber should be retained toward the center of the basket if Branch or Drop cables will be installed.
10. Branch or drop cables should be routed to the upper edge of the basket.

INNER BASKET APPLICATIONS

The optional Apex inner basket can be used to add additional protection to the backbone fiber when installing branched and drops.

The inner basket should be removed from the main basket for initial cable installation.

1. The Inner basket is released from the base by squeezing the two keyholes in the inner basket cover. (Figure 30)
2. Using a sheath knife or similar tool, pry hinge open at yoke. (Figure 31)
3. Rotate inner basket to remove from yoke.
4. To replace the inner basket, simply engage one mounting pin on the lower yoke and rotate inner basket to engage second pin. Raise and lower inner basket.

⊗ **There is no latch to release to lower the inner basket. Simply grasp firmly and lower into place.**

5. Basket tabs must be removed (if present) to utilize inner basket.
6. Secure tubes and fiber in inner basket with proper slack to open and close without pinching. (Figure 32)
7. Do not completely tighten the retention on fibers exiting to the tray. Basket fiber slack may need to be adjusted before final dressing.



Figure 27



Figure 28



Figure 29



Figure 30



Figure 31



Figure 32

SPLICE TRAY OPTIONS AND ROUTING

Apex splice trays are universal for Loose tube, Ribbon and SWR® splicing applications. Each Apex X-2 can hold up to 6 splice trays. Each Apex X-2 splice tray holds up to 4 modules.

FIBER	SLEEVES PER MODULE	X-2 SPLICE TRAY 4 MODULES
Single loose tube	18 splices triple stacked	72 fibers
Flat matrix ribbon	12 double stacked	288 fibers
SWR/Non-matrix ribbon	12 double stacked	576 fibers

Splice trays can be shipped empty, partially loaded or fully loaded and splice modules are field movable. (Figure 33)

1. To add a splice module to Apex splice tray, simply align the latch tabs. (Figure 34)
2. Slide to engage. (Figure 35)
3. To remove a splice module simply disengage the locking tabs on the back with a pair of shears and slide module to release latch. (Figure 36)
4. SWR and Loose Tube fiber is spliced using slack storage in the tray. (Figure 37)
5. Flat matrix ribbon is typically waterfall spliced; but there is room for storage if desired. (Figure 38)

⊗ *The openings between modules are designed to act as a fiber pathway if desired.*

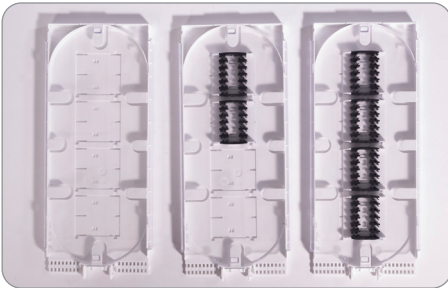


Figure 33

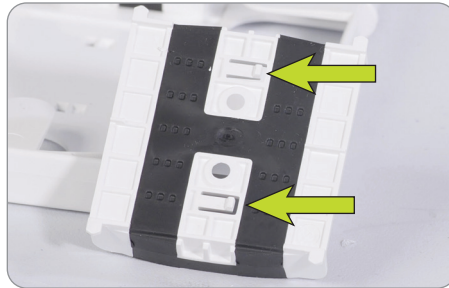


Figure 34

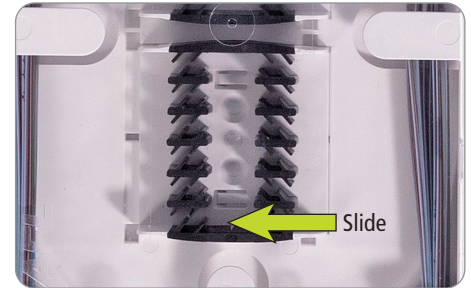


Figure 35



Figure 36

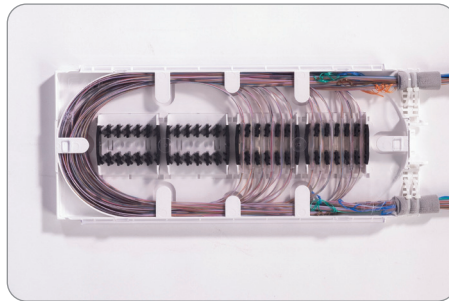


Figure 37

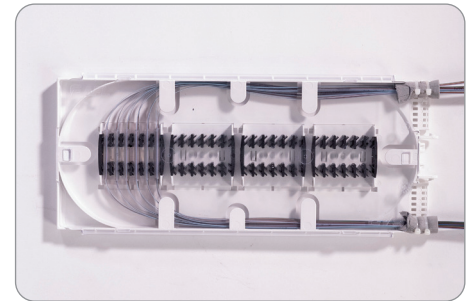


Figure 38

INSTALLING SPLICE TRAY

All types of splicing, loose tube or ribbon, can be done in the same splice tray and can coexist in the same tray if desired.

1. Splice trays should be installed from the bottom up without a gap.
2. Tubes should be attached to tray one layer at a time, bottom up to prevent trapping.
3. Install splice tray by engaging hinge pin onto yoke and rotating tray into place. (Figure 39)
4. Raise the tray to its upper locked position.
5. Release tray by depressing locking tab at the bottom center of the tray and lower into place. (Figure 40)
6. Loosely secure fiber or tubes at tray entrance.
 - Use a few wraps of electrical tape, or similar, on loose tube products. (Figure 41)
 - Two tie wraps per bundle – supplied. (Figure 41)
 - Secure with AFL foam retention. (Figure 42)
 - Transition tube. (Figure 43)
7. Begin routing to splice.
 - Each bundle of fibers will make a full loop in the tray to splice to the furthest location.
8. Once all splices are complete, address the slack behind the yoke in both open and closed positions. Adjust slack and secure both the tray and basket retention on the fibers.



Figure 39



Figure 40

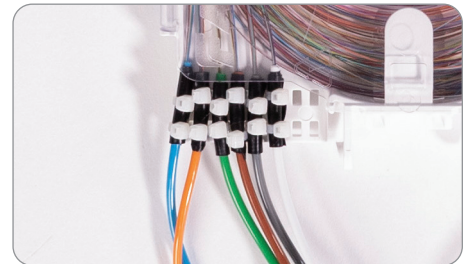


Figure 41

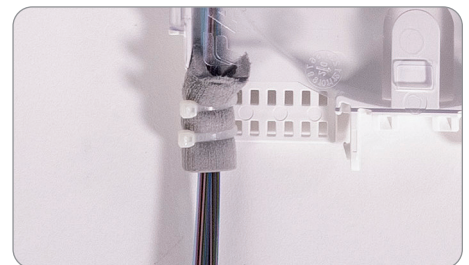


Figure 42

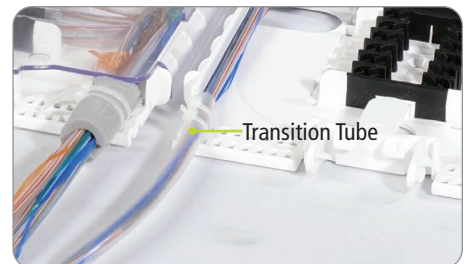


Figure 43

ALTERNATE SPLICING METHOD

Apex is designed for high-count fiber splicing. The following is a method where multiple splicers can work simultaneously on one case.

1. On the length table (page 7), use the "Sheath to Tray" distance.
2. Take fibers straight from CAU over the basket and mark fibers or tube at this distance.
 - Protect the fibers as they lay over the basket edge.
3. Secure fibers or tubes to tray at mark. (Figure 44)
4. Splice, route and close tray.
5. Figure-8 the fiber into the tray at the top of the basket and again under the yoke. (Figure 45)
6. Install trays starting from the bottom up without skipping a slot.
7. Once all splices are complete, address the slack behind the yoke in both open and closed positions. Adjust slack and secure both the tray and basket retention on the fibers.

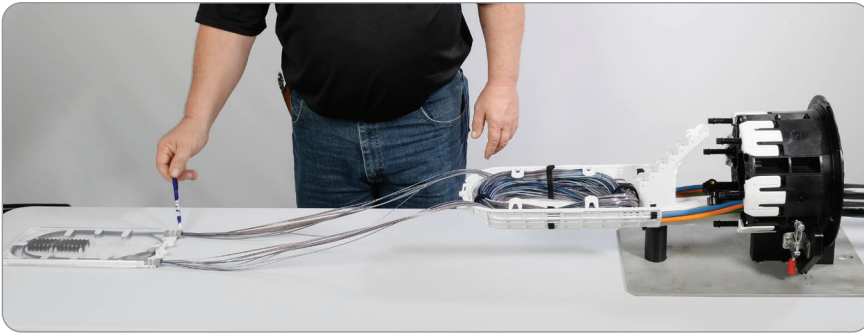


Figure 44



Figure 45

FINAL ASSEMBLY

1. Ensure all cables, tubes and fibers are secured on both tray and basket.
2. Ensure orange blank plugs are installed in every unused port.
3. Ensure small diameter bushings are fully seated on cables under ½".

⊗ *The gel compression screw must be in the open position to install the orange blank plug or the small diameter bushing.*

4. Ensure all gel compression screws are fully engaged.
5. Pull the two Velcro straps through the horizontal and vertical strap slots soft side up. (Figure 46)
6. Secure the horizontal strap. (Figure 47)
7. Secure the vertical strap. (Figure 47)
8. Apply a thin coat of supplied grease on the top and inside of the O-ring to prevent sticking when installing Apex into dome. (Figure 48)
9. Align the tab and slip dome on.
10. Engage lock ring latch and secure lock ring.
11. Note orientation of lock ring so the handle or hinge will not interfere with mount insert if pole/wall mounting. (Figure 49)
12. Secure lock ring handle to lock ring.
13. Apply lock tag if desired.

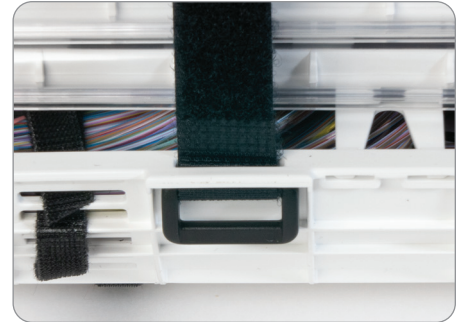


Figure 46

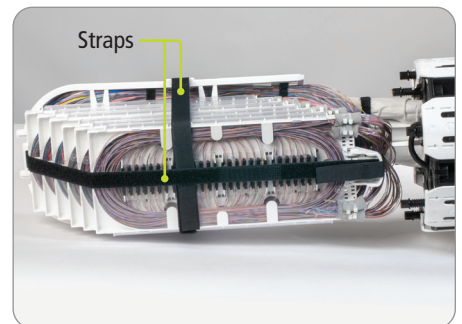


Figure 47



Figure 48

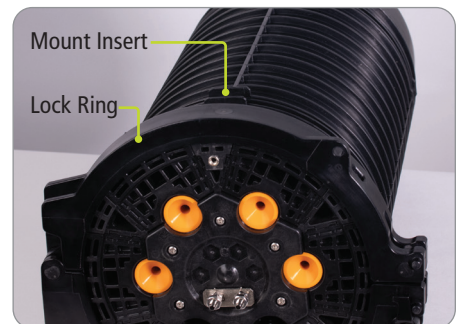


Figure 49

Flash test closure

1. Apply 5 PSI of air to the flash valve on dome. (Figure 50)
2. Inspect base for leaks with a spray of soapy water.
3. If there are no apparent bubbles, the closure passes.
4. If bubbling occurs:
 - Remove dome
 - Check sealing wedges
 - Check CAU brackets and hose clamps
 - Check the O-ring is clean and greased

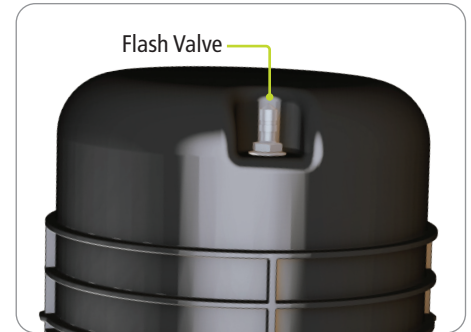


Figure 50

MOUNTING APEX

The Apex closure can be mounted to the strand using cable spacers and straps.

1. Align stack of cable spacers on the same side as the mount insert. (Figure 51)
2. Align strap with retention tabs on bottom of dome.
3. Secure straps and Apex to strand.



Figure 51

